

Warranty

**24**  
Months

Included

Battery  
mode

Included



RS 232

Optional

PC  
Software

**Technical Highlights:**

- Easy Operation
- Readout: 0.01 mm
- Pre length can be set manually
- RS 232 output to PC

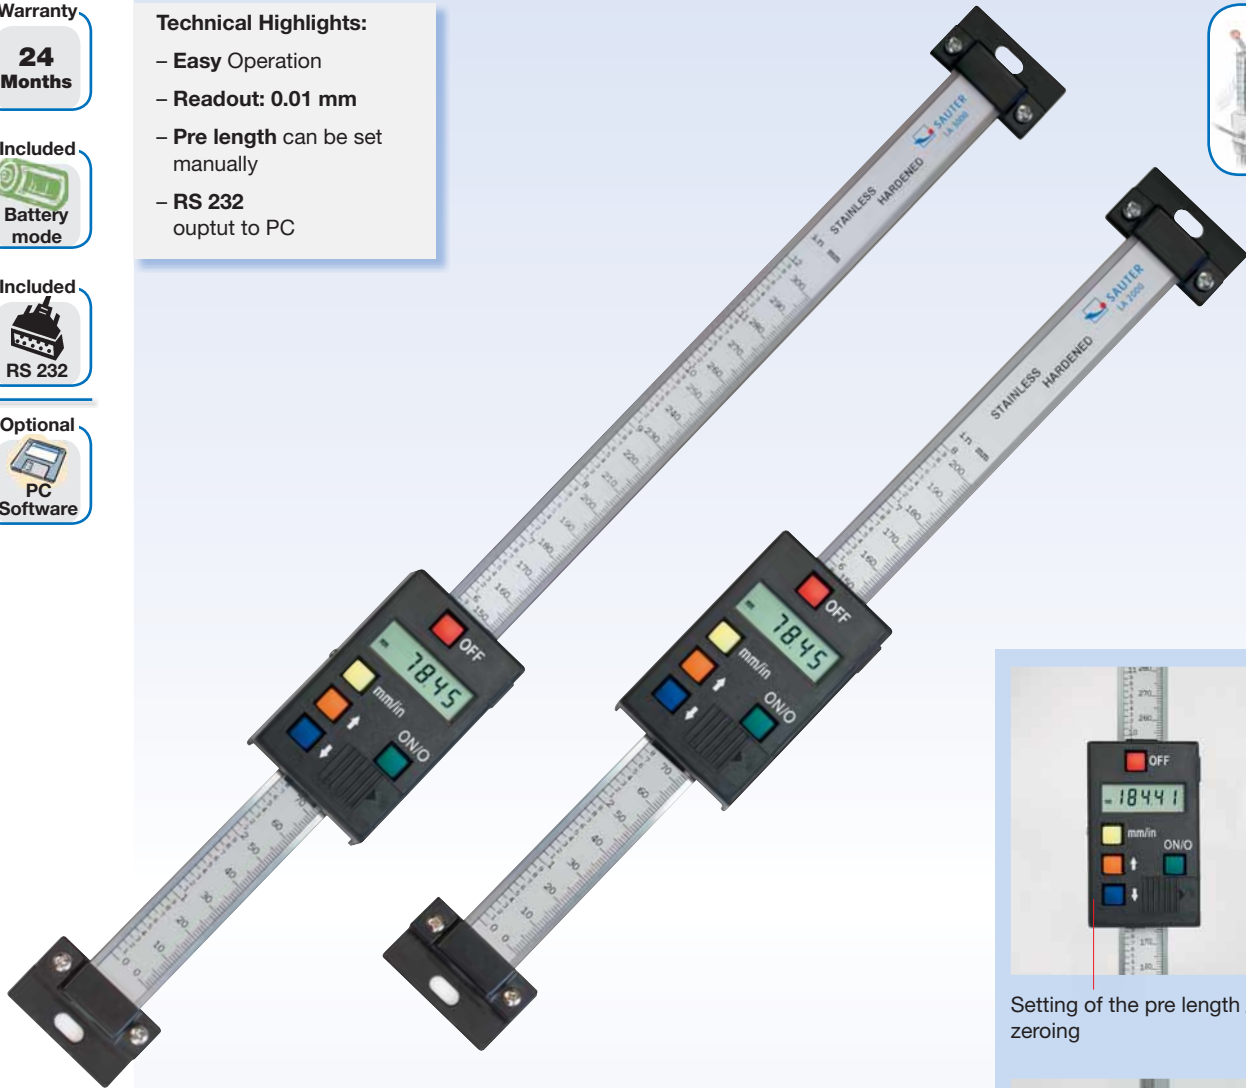

**Digital length bar** even at high operating speed.

Easy mounting to tooling machines, conveyer, test stands, etc.

**Zeroing, pre-adding and pre-reducing length** as well as switching the unit can be done manually.

Various base length versions available  
As a standard: 200 mm and 300 mm

**Battery included**

**Data output RS 232**  
to PC, included

**Options:**

- PC cable  
**SAUTER ALA 01**
- Data transfer software  
**SAUTER ALA 02**

Size: W: 43 mm,  
H: 18 mm

Selectable **units:**  
mm, inch



Setting of the pre length / zeroing



RS 232 PC Output

Model	Max Length	Readout	Direction	Length over all	Price, excl. VAT	ISO Calibration Certificate
LA 200-2	200 mm	0,01 mm	vertical	350 mm		
LA 300-2	300 mm	0,01 mm	vertical	450 mm		
LA 300-2H	300 mm	0,01 mm	horizontal	450 mm		