


WALL-E

"WALL-E" SERIES BENCH AND FLOOR SCALES

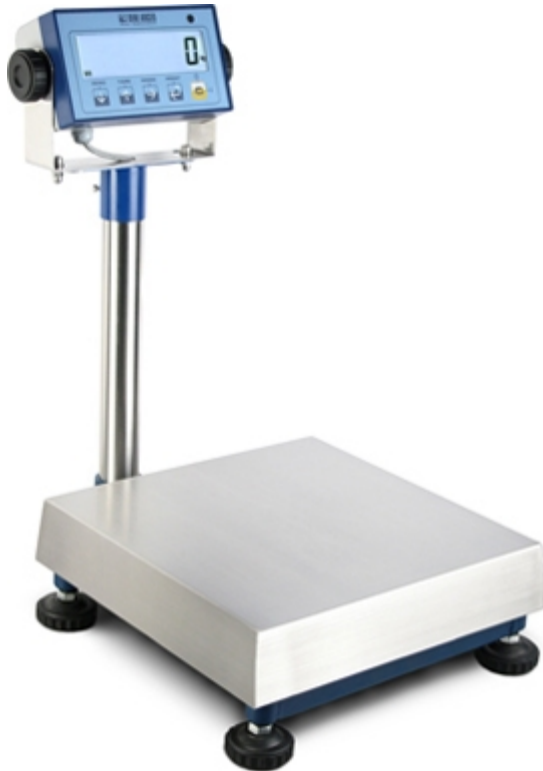

Bench and floor scales, with column, characterized by multifunction weight indicator, hard and sturdy structure and stainless steel loading surface. Easy to use and versatile, guaranteeing precision and reliability. Particularly suitable for industrial and commercial use. Available also in CE-M approved version according to OIML R-76 / EN 45501 standards.

Working in cooperation with:

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ
Tel. 0040-264566473 Fax. 0040-364-815440
office@cantare.com.ro

The best solution
for advanced industrial
applications

TECHNICAL FEATURES

- Weight indicator with ABS case, 25mm backlit LCD display with 6 high contrast digits and icons for showing the active functions. 5-key functional waterproof keypad.
- Functioning with an aluminium load cell, 3000d approved with IP65 protection degree.
- Steel tubular structure, oven-fire painted blue, with adjustable resting feet and level.
- Stainless steel loading surface, size: see the table.
- Fitted with fixing bracket with adjustable inclination and support column, height:
 - 350 mm in the "T" models;
 - 500 mm in the "Q" models;
 - 700 mm in the "X" and "E" models.
- Digital calibration and Set-Up from keypad or from PC through DINITOOLS.
- Power supply: 4 AA batteries or 230Vac power supplier.

SELECTABLE FUNCTIONS

- x 10 high resolution visualisation
- Net/Gross or lb/kg conversion
- Weights totalisation
- Formulation
- +/- Check
- Percentage weigh
- Alibi, for approved weight transmission (optional)
- Counting

I/O SECTION


- RS232/RS485 port for connection to PC, PLC or repeater.
- RS232 port configurable for connection to printer.
- IR input for managing the remote control.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- CE-M approval (OIML R-76 / EN 45501).
- Real time clock.
- Alibi Memory.
- Infrared remote control.
- USB interface.

VERSIONS

Versioni disponibili

| Codice | l x w x h (mm) | Max (kg) | d (g) |  (g) * |
|--------|-------------------|-------------|----------|--|
| WET6 | 300x300x130 | 6 | 2 | 2 |
| WET15 | 300x300x130 | 15 | 5 | 5 |
| WET30 | 300x300x130 | 30 | 10 | 10 |
| WEQ30 | 400x400x140 | 30 | 10 | 10 |
| WEQ60 | 400x400x140 | 60 | 20 | 20 |
| WEQ150 | 400x400x140 | 150 | 50 | 50 |
| WEX60 | 600x600x150 | 60 | 20 | 20 |
| WEX150 | 600x600x150 | 150 | 50 | 50 |
| WEX300 | 600x600x150 | 300 | 100 | 100 |
| WEE300 | 800x800x165 | 300 | 100 | 100 |
| WEE600 | 800x800x165 | 600 | 200 | 200 |

(*) Queste divisioni sono ottenibili solo con le relative opzioni.



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO
FRANCE sarl
Nogent-sur-Marne

DINI ARGEO
GMBH
Sinsheim - Germany

DINI ARGEO
UK Ltd
Taunton - United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China

DINI ARGEO
WEIGHBRIDGES
Calto (RO) – Italy



HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy



SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ

Tel. 0040-264566473 Fax. 0040-364-815440

office@cantare.com.ro

SALES AND TECHNICAL ASSISTANCE SERVICE