


Counting scale KERN IFS

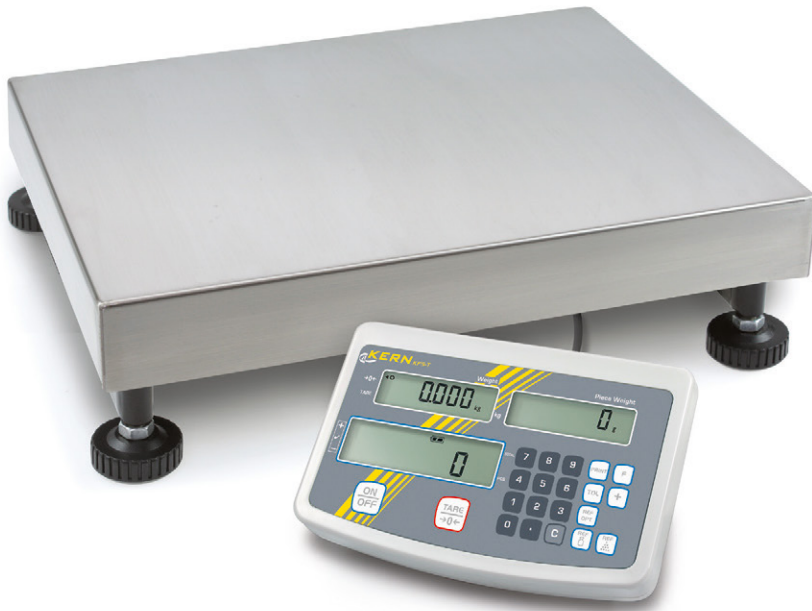

Industrial counting scale with convenient decimal keypad for easy data entry - now also with EC type approval [M], counting resolution up to 75,000 points

Features

- **Industrial quality:** because of its stable construction and robust design, it is ideal for continuous use in an industrial environment
- **Ergonomic display device** with large keypad and high-contrast LCD display for easy entry and reading of, e.g., tare weights, reference weights, limit values etc.
- **99 item memories** for master data such as reference weight, reference quantity, container weight (PRE-TARE) etc.

- **Precise counting:** The manual reference weight optimisation gradually improves the average value of the piece weight
- **Totalising** of piece counts

Technical data

- Large backlit LCD displays, digit height 16,5 mm
- Weighing plate dimensions, stainless steel, WxDxH

- A** 300x240x110 mm **B** 400x300x128 mm
- C** 500x400x137 mm
- D** 650x500x142 mm, see enlarged picture
- Dimensions of display device WxDxH 260x150x65 mm
- Cable length of display device approx. 2,5 m
- Permissible ambient temperature 0 °C / 40 °C

Accessories

- **Protective working cover** standard, can be reordered, KERN KFB-A02
- **Stand** to elevate display device, height of stand approx. 330 mm, KERN IFB-A01
height of stand approx. 600 mm, for models with weighing plate size **C** and **D**, KERN IFB-A02
- **Rechargeable battery pack internal**, operating time up to 40 h, charging time approx. 12 h, must be ordered at purchase, KERN KFS-A01
- **Suitable printers** see page 157 ff.

STANDARD



OPTION











































FACTORY



Model	Weighing range [Max] kg	Readout [d] g	Verification value [d] g	Min. piece weight [Counting] g/piece	Counting resolution Points	Net weight approx. kg	Weighing plate	Options			
								Verification		DAkkS Calibr. Certificate	
								M	KERN	DAkkS	KERN
Dual-range scale switches automatically to the next largest weighing range [Max] and readout [d].											
IFS 10K-4	6 15	0,1 0,2		0,2	75.000	6,5	A			963-128	
IFS 30K0.2DL	12 30	0,2 0,5		0,5	60.000	10	B			963-128	
IFS 60K0.5D	30 60	0,5 1		1	60.000	10	B			963-129	
IFS 60K0.5DL	30 60	0,5 1		1	60.000	16	C			963-129	
IFS 100K-3	75 150	1 2		2,5	60.000	16	B			963-129	
IFS 100K-3L	75 150	1 2		2,5	60.000	24	C			963-129	
IFS 300K-3	150 300	2 5		5	60.000	24	C			963-129	
Note: For applications that require verification, please order verification at the same time, initial verification at a later date is not possible. Verification at the factory, we need to know the full address of the location of use.											
IFS 6K-3M	3 6	1 2	1 2	0,1	60.000	6,5	A		965-228	963-128	
IFS 10K-3M	6 15	2 5	2 5	0,2	75.000	6,5	A		965-228	963-128	
IFS 10K-3LM	6 15	2 5	2 5	0,2	75.000	10	B		965-228	963-128	
IFS 30K-3M	15 30	5 10	5 10	0,5	60.000	10	B		965-228	963-128	
IFS 60K-2M	30 60	10 20	10 20	1	60.000	10	B		965-229	963-129	
IFS 60K-2LM	30 60	10 20	10 20	1	60.000	16	C		965-229	963-129	
IFS 100K-2M	60 150	20 50	20 50	2,5	60.000	16	C		965-229	963-129	
IFS 100K-2LM	60 150	20 50	20 50	2,5	60.000	24	D		965-229	963-129	
IFS 300K-2M	150 300	50 100	50 100	5	60.000	24	D		965-229	963-129	

NEW New model

KERN Pictograms

 Internal adjusting: Quick setting up of the balance's accuracy with internal adjusting weight (motordriven).	 Recipe level A: Separate memory for the weight of the tare container and the recipe ingredients (net total).	 Suspended weighing: Load support with hook on the underside of the balance.
 Adjusting program CAL: For quick setting up of the balance's accuracy. External adjusting weight required.	 Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display.	 Battery operation: Ready for battery operation. The battery type is specified for each device.
 Memory: Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.	 Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation functions.	 Rechargeable battery pack: Rechargeable set.
 Data interface RS-232: To connect the balance to a printer, PC or network.	 Totalising level A: The weights of similar items can be added together and the total can be printed out.	 Mains adapter: 230V/50Hz in standard version for EU. On request GB, AUS or USA version available.
 RS-485 data interface: To connect the balance to a printer, PC or other peripherals. High tolerance against electromagnetic disturbance.	 Totalising level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation.	 Power supply: Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.
 USB data interface: To connect the balance to a printer, PC or other peripherals.	 Strain gauges: Electrical resistor on an elastic deforming body.	 Tuning fork principle: A resonating body is electromagnetically excited, causing it to oscillate.
 Bluetooth data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Percentage determination: Determining the deviation in % from the target value (100 %).	 Electromagnetic force compensation: Coil inside a permanent magnet. For the most accurate weighings.
 WLAN data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Weighing units: Can be switched to e.g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.	 Single cell technology: Advanced version of the force compensation principle with the highest level of precision.
 Control outputs (optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.	 Weighing with tolerance range: Upper and lower limiting values can be programmed individually for e.g. dosing, sorting and portioning.	 Verification possible: The time required for verification is specified in the pictogram.
 Interface for second balance: For direct connection of a second balance.	 Vibration-free weighing: (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value.	 DAkkS calibration possible: The time required for DAkkS calibration is shown in days in the pictogram.
 Network interface: For connecting the scale to an Ethernet network. With KERN products you can use a universal RS-232/LAN converter.	 Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram. For details see the glossary.	 Package shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: The balance displays the weight, date and time, regardless of a printer connection.	 ATEX explosion protection: Suitable for use in hazardous industrial environments, in which there is explosion danger. The ATEX marking is specified for each device.	 Pallet shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: With weight, date and time. Only with KERN printers, see "Accessories"	 Stainless steel: The balance is protected against corrosion.	 Warranty: The warranty period is shown in the pictogram.
 Piece counting: Reference quantities selectable. Display can be switched from piece to weight.		

Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2000 kg. In combination with a DAkkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAkkS calibration laboratory today is one of the most modern and best-equipped DAkkS calibration laboratories for balances, test weights and force-measurement in Europe.

Your KERN specialist dealer:

Thanks to the high level of automation, we can carry out DAkkS calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DAkkS calibration of balances with a maximum load of up to 6 t
- DAkkS calibration of weights in the range of 1 mg - 500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAkkS calibration certificates in the following languages D, GB, F, I, E, NL