


Crane scale KERN HFB

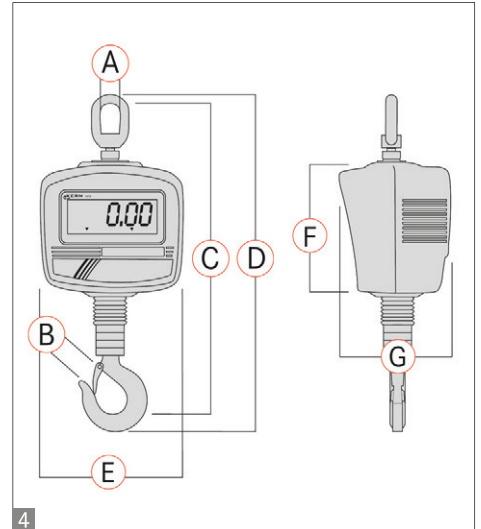

The professional alternative up to 600 kg with rear-facing second display

Features

- 1 With the TÜV certification mark, the scale meets the requirements of the standard EN 13155 (Non-fixed load lifting attachments) and EN 61010-1 (Electrical safety)
- 2 **Second display** on the rear of the balance
- High mobility:** thanks to battery operation, compact construction and low weight, it is suitable for use in several locations (production, warehouse, dispatch department etc.)
- Data hold function:** When the weighing value remains unchanged the weight indicated on the display is automatically "frozen" until the HOLD key is pressed
- Tare:** Resets the display to "0" when there is a load on the scale. Now removed or added loads are directly displayed

- **Hook with safety catch**, revolving
- Shackle and hook connection made of nickel-plated steel
- 3 **Radio remote control** standard. Range approx. 20 m. All functions can be selected (excl. ON/OFF). WxDxH 48x10x95 mm. Batteries included 2 x 1,5 V AAA

Technical data

- Superior display size: digit height 25 mm. Bright backlight for easy reading of weight, even from a distance
- Dimensions housing WxDxH 163x126x158.5 mm

- Rechargeable battery pack internal, standard, operating time approx. 40 h, charging time approx. 14 h with mains adapter, charge status indication visualised through LED
- Precision: 0.2 % from [Max]
- Permissible ambient temperature 0 °C / 40 °C

STANDARD



OPTION



Model	Weighing range [Max] kg	Readout [d] g	Net weight approx. kg	4 Dimensions							Option		
				A	B	C	D	E	F	G	DAKKS KERN	DAKKS Calibr. Certificate	
				mm	mm	mm	mm	mm	mm	mm			
KERN													
HFB 150K50	150	50	3,2	26	25	358	390	163	158,5	126		963-129H	
HFB 300K100	300	100	3,2	26	25	358	390	163	158,5	126		963-129H	
HFB 600K200	600	200	3,2	26	25	358	390	163	158,5	126		963-130H	

KERN Pictograms

 Internal adjusting: Quick setting up of the balance's accuracy with internal adjusting weight (motordriven).	 Recipe level A: Separate memory for the weight of the tare container and the recipe ingredients (net total).	 Suspended weighing: Load support with hook on the underside of the balance.
 Adjusting program CAL: For quick setting up of the balance's accuracy. External adjusting weight required.	 Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display.	 Battery operation: Ready for battery operation. The battery type is specified for each device.
 Memory: Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.	 Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation functions.	 Rechargeable battery pack: Rechargeable set.
 Data interface RS-232: To connect the balance to a printer, PC or network.	 Totalising level A: The weights of similar items can be added together and the total can be printed out.	 Mains adapter: 230V/50Hz in standard version for EU. On request GB, AUS or USA version available.
 RS-485 data interface: To connect the balance to a printer, PC or other peripherals. High tolerance against electromagnetic disturbance.	 Totalising level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation.	 Power supply: Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.
 USB data interface: To connect the balance to a printer, PC or other peripherals.	 Strain gauges: Electrical resistor on an elastic deforming body.	 Tuning fork principle: A resonating body is electromagnetically excited, causing it to oscillate.
 Bluetooth data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Percentage determination: Determining the deviation in % from the target value (100 %).	 Electromagnetic force compensation: Coil inside a permanent magnet. For the most accurate weighings.
 WLAN data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Weighing units: Can be switched to e.g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.	 Single cell technology: Advanced version of the force compensation principle with the highest level of precision.
 Control outputs (optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.	 Weighing with tolerance range: Upper and lower limiting values can be programmed individually for e.g. dosing, sorting and portioning.	 Verification possible: The time required for verification is specified in the pictogram.
 Interface for second balance: For direct connection of a second balance.	 Vibration-free weighing: (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value.	 DAkkS calibration possible: The time required for DAkkS calibration is shown in days in the pictogram.
 Network interface: For connecting the scale to an Ethernet network. With KERN products you can use a universal RS-232/LAN converter.	 Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram. For details see the glossary.	 Package shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: The balance displays the weight, date and time, regardless of a printer connection.	 ATEX explosion protection: Suitable for use in hazardous industrial environments, in which there is explosion danger. The ATEX marking is specified for each device.	 Pallet shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: With weight, date and time. Only with KERN printers, see "Accessories"	 Stainless steel: The balance is protected against corrosion.	 Warranty: The warranty period is shown in the pictogram.
 Piece counting: Reference quantities selectable. Display can be switched from piece to weight.		

Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2000 kg. In combination with a DAkkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAkkS calibration laboratory today is one of the most modern and best-equipped DAkkS calibration laboratories for balances, test weights and force-measurement in Europe.

Your KERN specialist dealer:

Thanks to the high level of automation, we can carry out DAkkS calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DAkkS calibration of balances with a maximum load of up to 6 t
- DAkkS calibration of weights in the range of 1 mg - 500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAkkS calibration certificates in the following languages D, GB, F, I, E, NL